


# SINGLE PHASE CIRCUIT SEPARATION TRANSFORMERS

Ref : 1M312-TN-K353

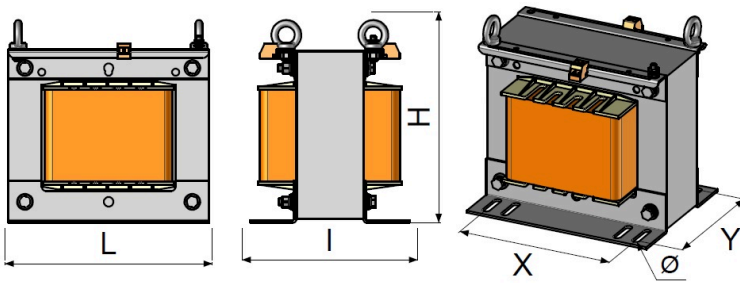

\*Dimensions are expressed in millimeters, mass in kilograms and reserves represent the ventilation space to be kept around the product for good heat dissipation. The drawing is not contractual.

## Notes et options

Options: Adjustment taps, Multi-voltages, Electrostatic screen, Reduced inrush current, Low consumption, Resistance to harmonics, Silent block, caster, Integrated protections, reinforced insulation, Tropicalization, Class II, transformer Factor K5, K7, K9 , High frequencies.

Additional options for the covered versions: Specific color paint, IP21 to IP55, Built-in case with integrated protections, custom housing possible,

Product reference	1M312-TN-K353
Power/Value	3.15 KVA
IP Indice	IP00
Voltage(s)/Current	230.400V $\pm$ 15V / 230V
Number of Phases	Single-Phase
Use frequency	50-60Hz
Dimensions (L x I x H)	240 x 200 x 243
Fixings: X x Y x Ø (mm)	200 x (116 - 176) x 9
Weight	35
Standard	IEC 61558-2-4
Winding material	Copper
RoHS compliant	Yes
Temperature rise class	Classe F
Eyebolts	Yes
Recommended Electrical Protection Input / Output	DJ D - 25A / DJ C - 16A
Dielectric Input/Output and active/ground	2500V / 4000V
Insulation class	I
Cooling	Air Naturel
Electrostatic Screen	Yes